


VOCALITY INTERNATIONAL – APPLICATION NOTE		
REF: AN026	REVISION: V01	PAGE 1 OF 1
TITLE: Installation of Voice/Fax Daughtercard (VI68702)		



WARNING: STATIC SENSITIVE COMPONENTS!
ESD PRECAUTIONS MUST BE OBSERVED WHEN FITTING OPTION CARDS

1. Ensure that the V100 is powered down, and all connections to the existing Voice/Fax Motherboard (VI68701) are removed.
2. To install the Voice/Fax Daughterboard (VI68702), remove the Voice/Fax Motherboard by unscrewing the two M3 retaining screws.
3. Unpack the Voice Daughterboard, and fit onto J1 and J2 of the Voice Motherboard.
CARE MUST BE TAKEN TO ENSURE CORRECT ALIGNMENT OF THE PINS.
4. Refit the combined Voice Mother & Daughterboard assembly into the V100 chassis.
5. Replace the two M3 screws to secure the Voice card blanking plate to the V100 chassis.
6. After powering up the V100, the Voice Daughterboard will be automatically detected. The additional 4 voice channels will need configuring. This is carried out on the V100 Voice Configuration page via the "SUPERVISOR" channel.

V100 Voice Motherboard

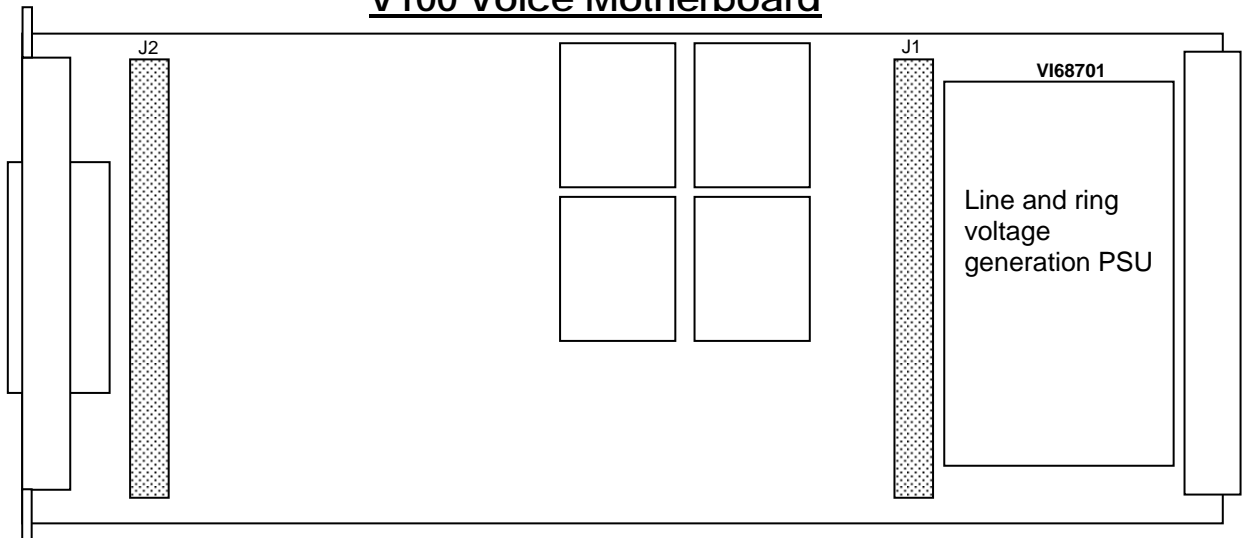

V100 Voice Daughterboard

